

TYRE CHANGER TC-712A

PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE



AUTOMATIC MOUNT / DEMOUNT HEAD
No lever technology




INDEPENDENT O56 HELP ARM SYSTEM
3 mobile hands for auxiliary mounting /demounting tires



Quick air
booster pedal



Tilting arm



**Quick air
booster tank**



**2 years
warranty**



Noise level

RIM CLAMPING METHOD





Inside clamping
14~26"

Outside clamping
12~23"

SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension (056 help arm)	1550*310*550mm(5.0*1.0*1.8 ft)
N/G weight (total)	363/395kg kg(800.3/870.8 lbs)

TIRE DIMENSION

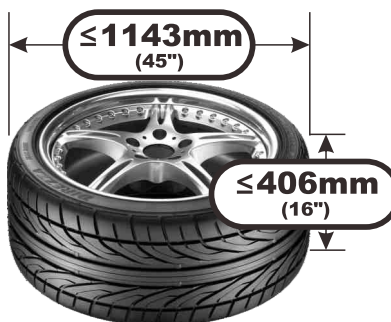

Protec Equipment Canada
2410 Dunwin Drive, unit 6, Mississauga, Ontario L5L 1J9
Tel: 905-569-8878 Fax: 905-569-1238 www.protecequipment.ca